


FLOW 556k


RIFLE

HUXWRX
SAFETY CO.

THE FIRST 3D-PRINTED FLOW-THROUGH® SUPPRESSOR

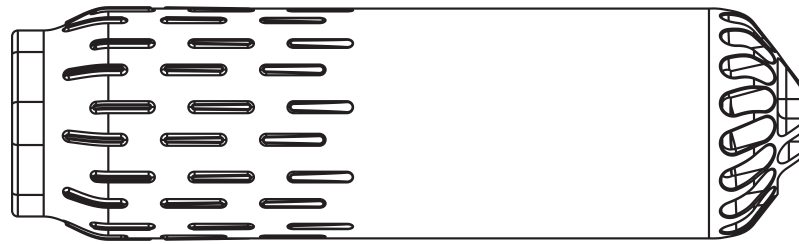

5.5in
14.0cm

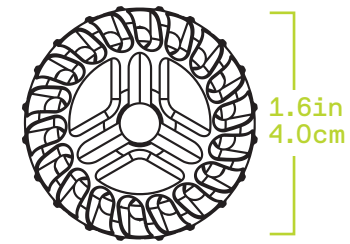

1.6in
4.0cm

Length added to barrel:
4.9in / 12.4cm

PRODUCT SPECIFICATIONS

| | | | |
|----------------------|---|-----------------------------|--|
| Weight | 12.9oz / 366g | Technology Readiness | TR Level 9 Fully developed, in production. |
| Caliber | 5.56, .223, 17 HMR, 5.7, 22 LR, 5.45 | Mounts | 556 QD Muzzle Brakes and Flash Hiders |
| Bolt Velocity | ±4% from base w/ Flash Hider-QD 556* | Barrel Length | No restrictions |
| Materials | 17-4 Heat Treated Stainless Steel | Durability | Passes 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines) |
| Coating | C-Series Cerakote™ Matte Black (Flat Dark Earth available) | Maintenance | Detailed cleaning should be performed every 2,500 rounds. |

WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. and OSS Suppressors. For more information, visit www.huxwrx.com/warranty.

*Varies depending on weapon platform

HUXWRX.COM