

FALCON BIPODS

with canting

The Falcon Bipods have been designed to provide the ultimate stability. Two models are offered, Picatinny rail or AES (ARCA) mounting variants. It features multiple optional modular quick-change accessories such as spike, claw or ski feet. An optional Extension Leg kit is also available for the ELR game where shooters engage targets beyond 2 miles and require lots of bipod elevation without sacrificing the rifle's stability.



FEATURES:

- Fast deployment legs without buttons to push.
- Ultra-tight machining tolerances for maximum stiffness and reduced free play.
- Reversible legs for choice of index or thumb push button operation.
- Easy to operate canting lever. Tilt angle +/- 15.5°.
- Folds/deploys forward, rearward 45° or standard 90°.
- Standard rubber feet, optional claw, spike or ski feet. (P. 90)
- Incredibly stable (width from 11.4" to 13.3").
- Designed to withstand recoil up to 50 BMG.
- Adjustable height from approx. 6.25" to 9" depending on the model.




FALCON QD BIPOD - Part#: 7431-K015

FALCON AES BIPOD - Part#: 7431-K015AES



SPECIFICATIONS	Falcon QD Bipod
	Shortened: 11.41" x 5.19" x 6.73" 28.98 x 13.18 x 17.09 cm
	Extended: 13.28" x 5.19" x 8.35" 33.73 x 13.18 x 21.21 cm
	Folded: 8.8" x 5.1" x 2.89" 22.35 x 12.96 x 7.33 cm
	Weight (±): 1.39 lb 630 grams
	Material: 6061-T6 aluminum



SPECIFICATIONS	Falcon AES Bipod
	Shortened: 11.4" x 3.98" x 7.51" 28.96 x 10.12 x 19.07 cm
	Extended: 13.28" x 3.98" x 9.13" 33.72 x 10.12 x 23.19 cm
	Folded: 9.96" x 5.1" x 3.59" 25.3 x 12.95 x 9.13 cm
	Weight (±): 1.65 lb 748 grams
	Material: 6061-T6 aluminum

FALCON BIPOD


with canting

The Falcon SP was designed to be adjustable to adapt to any given situation using a combination of different feet attachment and built-in features. The Single Pivot (SP) mount allows the bipod to cant around a central pivot point rather than slide under. It is mainly manufactured using 6061-T6 aluminum and fiber reinforced polymers allowing it to be both light and sturdy.


FEATURES:

- All the same features as the regular Falcon bipod except that it cants around a central pivot point
- QD locking lever
- Picatinny attachment

FALCON SP BIPOD - Part#: 7431-K017SP



SPECIFICATIONS	Falcon SP Bipod
	Shortened: 11.41" x 4.3" x 7.24" 28.98 x 10.92 x 18.39 cm
	Extended: 13.29" x 4.3" x 8.86" 33.76 x 10.92 x 22.5 cm
	Folded: 8.12" x 5.1" x 2.68" 20.62 x 12.95 x 6.8 cm
	Weight (±): 1.30 lb 588 grams
	Material: 6061-T6 aluminum

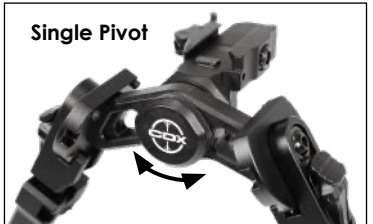


FALCON LITE BIPOD

with panning and canting


The Falcon Lite bipod is the result of an extensive product development project for a military unit. Their snipers were in need of a light bipod, solid, stable and featuring both a panning and canting capability. At less than 400 grams, the Falcon Lite features a quick-detach (QD) Picatinny mount, a tensioning lever, telescopic aluminum tube legs and modular feet attachments. This bipod has a very wide footprint spread and some of the tightest machining tolerances on the market, making it the most stable lightweight bipod you'll find. The modular locking feet attachments are a must to adapt to any shooting surfaces.

FALCON LITE (C20 SASW) - Part#: 7431-K102

SPECIAL ORDER ONLY



SPECIFICATIONS	Falcon Lite (C20 SASW)
	Shortened: 10.5" x 3.31" x 6.27" 26.68 x 8.41 x 15.93 cm
	Extended: 13.54" x 3.31" x 8.9" 34.4 x 8.41 x 22.61 cm
	Folded: 8.43" x 4.49" x 2.61" 21.42 x 11.41 x 6.64 cm
	Weight (±): 0.82 lb 374 grams
	Material: 6061-T6 aluminum


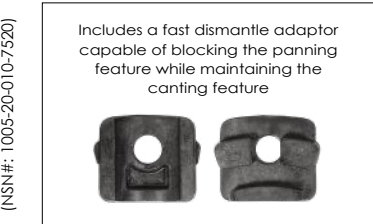


(NSN#: 1005-20-010-7520)

FALCON LITE BIPODS



with panning and canting

The Falcon Lite bipods utilize a small head design, allowing for a more compact bipod better suited for competitive PRS shooting. It offers the same great canting capability as the bigger Falcon models, in a lighter weight package (only 400-450 grams), without any compromise on its rigidity. It also adds the panning feature, a quick-detach (QD) Picatinny mount, a tensioning lever and 9 position telescopic aluminum tube legs. These bipods have a very wide footprint spread and some of the tightest machining tolerances on the market, making them the most stable lightweight bipods you'll find. The modular locking feet attachments are a must to adapt to any shooting surface.

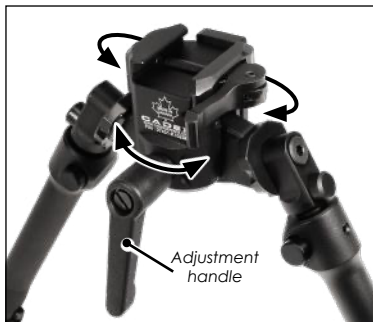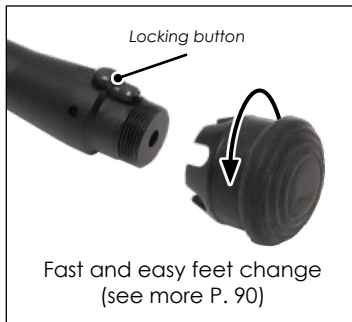

FALCON LITE SP BIPOD - Part#: 7431-K102SP

FALCON LITE AES BIPOD - Part#: 7431-K102AES




SPECIFICATIONS

Falcon Lite SP Bipod

Shortened: 9.81" x 3.31" x 6.81" | 24.91 x 8.41 x 17.29 cm
Extended: 12.84" x 3.31" x 9.43" | 32.62 x 8.41 x 23.96 cm
Folded: 8.44" x 3.79" x 2.87" | 21.43 x 9.63 x 7.28 cm
Weight (±): 0.88 lb | 399 grams
Material: 6061-T6 aluminum



Includes fast dismantle adaptors capable of blocking the panning feature while maintaining the canting capability



5 angle positions



Wide leg spread

SPECIFICATIONS

Falcon Lite AES Bipod

Shortened: 9.81" x 3.31" x 6.9" | 24.91 x 8.41 x 17.53 cm
Extended: 12.84" x 3.31" x 9.52" | 32.62 x 8.41 x 24.28 cm
Folded: 8.43" x 3.79" x 3" | 21.4 x 9.63 x 7.63 cm
Weight (±): 0.98 lb | 445 grams
Material: 6061-T6 aluminum

BIPOD ACCESSORIES

All Cadex Falcon and Falcon Lite series bipods are modular and share the same foot attachments. Although each of them include rubber feet as a standard, multiple other optional foot attachments can be added. While rubber feet remain the best overall configuration, some specific sports may benefit from the use of more dedicated foot attachments. Here are our recommendations based on their purpose.

PRS SHOOTING

- Rubber feet
- Spike feet

F-CLASS & BENCH SHOOTING

- Rubber feet
- Ski feet

ELR SHOOTING

- Rubber feet
- Ski feet
- Extension leg kit

PRONE FIELD SHOOTING

- Rubber feet
- Spike feet
- Claw feet
- Ski feet



RUBBER FEET - Part#: 7431-K105-K2



Rubber feet are included with every bipod model

SPIKE FEET - Part#: 7431-K106-K2



(NSN#: 1005-20-010-6707)

CLAW FEET - Part#: 7431-K104-K2



SKI FEET - Part#: 7431-K331-K2



EXTENSION LEG KIT - Part#: 7431-K108-K2

+2" extra length

*Compatible with any foot attachments



(NSN#: 1005-20-011-4456)